

RECESSED DOWNLIGHTS

NEBULA TLR



Description:

Nebula D.Flex TLR is a fully adjustable LED downlights that provide bright, energy-efficient illumination. They are designed to meet all your indoor lighting needs, they feature long lifespan and high performance, making them the perfect choice for homes and offices.

Specifications:

Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)		
								Ø	Cut-out	H
6W	540lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	75	55	50
10W	900lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	95	75	100
14W	1260lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	95	75	100
20W	1800lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	115	95	120

*Available in other CCTs on request.


*Available in CRI 90 on request.

*Above values are based on SEI calibrated machines testing while using wide beam angles & on the black matt reflector.


Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die-Cast Aluminum	Electrostatic Painting	PMMA Lens with Outer PC Reflector	Included	Separated - Outside	15°, 36° & 60°

Photometric:

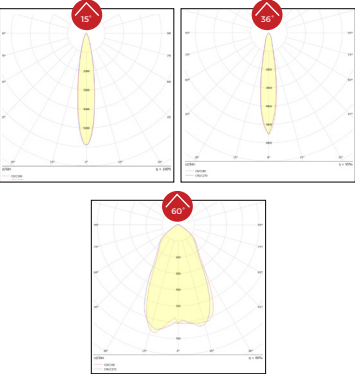

General Dimensions:

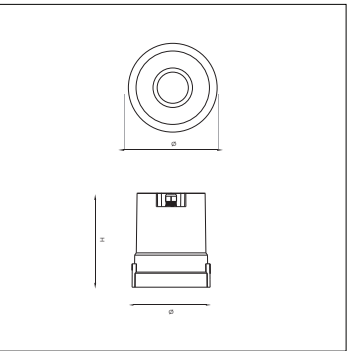

Reflector Finish:



Applications:



Category:
Indoor

Product Type:
Downlight

Mounting Type:
Recessed



L80B50