

RECESSED DOWNLIGHTS

NEBULA R



Description:

Nebula R LED downlights are ideal ceiling-mounted fixtures that provide bright, energy-efficient illumination. They are designed to meet all your indoor lighting needs, they feature long lifespan and high performance, making them the perfect choice for homes and offices.

Specifications:

Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)			
								Ø	Cut-out	H	
6W	540lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	62	55	80	85
10W	900lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	84	75	101	110
14W	1260lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	84	75	101	110
20W	1800lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	105	95	122	130

*Available in other CCTs on request.

*Available in CRI 90 on request.


*Above values are based on SEI calibrated machines testing on the white matt reflector.

*Above values are for IP20.


Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die-Cast Aluminum	Electrostatic Painting	PMMA Lens with Outer PC Reflector	Included	Separated - Outside	15°, 36° & 60°

Photometric:

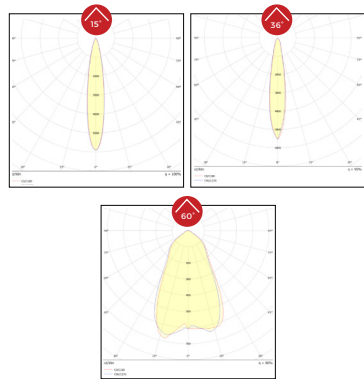

General Dimensions:

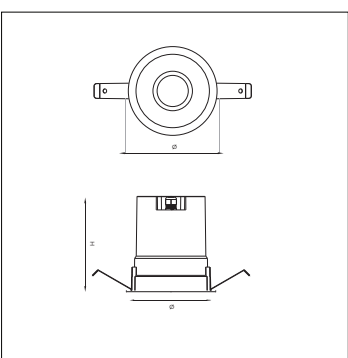

Reflector Finish:



Applications:



Category:
Indoor

Product Type:
Downlight

Mounting Type:
Recessed



L80B10