

RECESSED DOWNLIGHTS

NEBULA DOUBLE SQ



Description:

Nebula D.Flex Double SQ is a fully adjustable LED downlights that provide bright, energy-efficient illumination. They are designed to meet all your indoor lighting needs, they feature long lifespan and high performance, making them the perfect choice for homes and offices.

Specifications:

| Wattage | Lumen | Efficacy | Power Factor | CRI | CCT | Voltage | Frequency | Dimensions (mm) | | | |
|---------|--------|----------|--------------|------|------------|-------------|-----------|-----------------|-----|---------|-----|
| | | | | | | | | L | W | Cut-out | H |
| 12W | 1080lm | 90lm/w | >0.95 | ≥ 80 | 2700-5700K | 220-240 VAC | 50/60 Hz | 157 | 85 | 148x76 | 111 |
| 20W | 1800lm | 90lm/w | >0.95 | ≥ 80 | 2700-5700K | 220-240 VAC | 50/60 Hz | 157 | 85 | 148x76 | 111 |
| 28W | 2520lm | 90lm/w | >0.95 | ≥ 80 | 2700-5700K | 220-240 VAC | 50/60 Hz | 157 | 85 | 148x76 | 111 |
| 40W | 3600lm | 90lm/w | >0.95 | ≥ 80 | 2700-5700K | 220-240 VAC | 50/60 Hz | 197 | 105 | 188x96 | 137 |

*Available in other CCTs on request.


*Available in CRI 90 on request.

*Above values are based on SEI calibrated machines testing while using wide beam angles & on the black matt reflector.


Features:

| Body Material | Finishing | Optics | Driver | Driver Mounting | Beam Angle |
|-------------------|------------------------|-----------------------------------|----------|---------------------|----------------|
| Die-Cast Aluminum | Electrostatic Painting | PMMA Lens with Outer PC Reflector | Included | Separated - Outside | 15°, 36° & 60° |

Photometric:

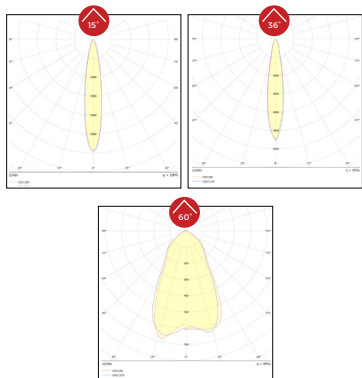

General Dimensions:

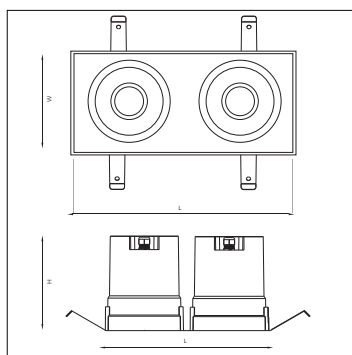

Reflector Finish:



Applications:



Category:
Indoor

Product Type:
Downlight

Mounting Type:
Recessed



L80B50