
RECESSED DOWNLIGHTS NEBULA DOUBLE SR



Description:

Nebula Double SR LED downlights are ideal ceiling-mounted fixtures that provide bright, energy-efficient illumination. They are designed to meet all your indoor lighting needs, they feature long lifespan and high performance, making them the perfect choice for homes and offices.



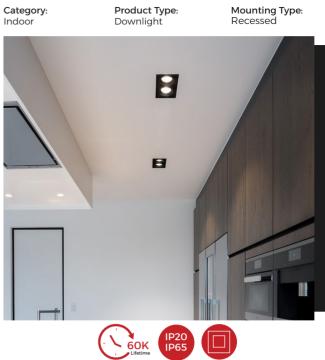





Specifications:


Wattage	Lumen	Efficacy	Power Factor	CRI	сст	Voltage	Frequency	Dimensions (mm)				
								L	W	Cut-out	Н	
									VV		IP20	IP65
12W	1080lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	180	91	165x79	112	121
20W	1800lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	180	91	165x79	112	121
28W	2520lm	90lm/w	>0.95	≥80	2700-5700K	220-240 VAC	50/60 Hz	180	91	165x79	112	121
40W	3600lm	90lm/w	>0.95	≥80	2700-5700K	220-240 VAC	50/60 Hz	224	110	209x98	134	142

^{*}Available in other CCTs on request.


Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die-Cast Aluminum	Electrostatic Painting	PMMA Lens with Outer PC Reflector	Included	Separated - Outside	15°, 36° & 60°

Photometric:



General Dimensions:



Reflector Finish:



Applications:















^{*}Available in CRI 90 on request.

^{*}Above values are based on SEI calibrated machines testing on the white matt reflector.