

RECESSED DOWNLIGHTS

NEBULA TLR



Category: Indoor Product Type: Downlight Mounting Type: Recessed



Description:

Nebula TLR LED downlights are ideal ceiling-mounted fixtures that provide bright, energy-efficient illumination. They are designed to meet all your indoor lighting needs, they feature long lifespan and high performance, making them the perfect choice for homes and offices.



Specifications:


Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)			
								Ø	Cut-out	H	
6W	540lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	75	55	79	85
10W	900lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	95	75	101	110
14W	1260lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	95	75	101	110
20W	1800lm	90lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	115	95	122	130

*Available in other CCTs on request.
*Available in CRI 90 on request.
*Above values are based on SEI calibrated machines testing on the white matt reflector.


Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die-Cast Aluminum	Electrostatic Painting	PMMA Lens with Outer PC Reflector	Included	Separated - Outside	15°, 36° & 60°


Photometric:

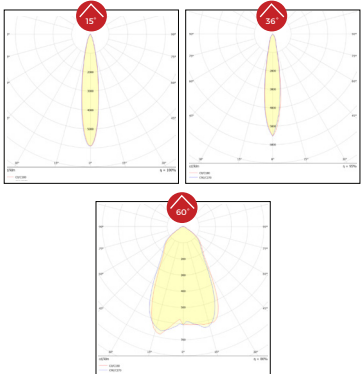

General Dimensions:

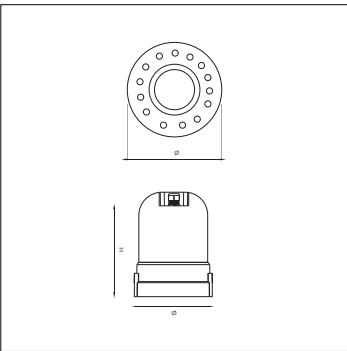

Reflector Finish:



Applications:

