

RECESSED DOWNLIGHTS

NEBULA DOUBLE TLSQ



Description:

Nebula Pop-out Double TLSQ **trimless**, retractable downlights offer exceptional flexibility for residential and retail lighting. They provide precise, focused illumination to highlight interior details. Their retractable structure allows for seamless integration into modern interiors, enabling dynamic lighting adjustments.

Specifications:


Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)			
								L	W	Cut-out	H
12W	1140lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	146	74	149x76	116
20W	1900lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	146	74	149x76	116
28W	2660lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	146	74	149x76	116
40W	3800lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	186	94	189x96	144

*Available in other CCTs on request.
*Available in CRI 90 on request.
*Above values are based on SEI calibrated machines testing while using wide beam angles & on the black matt reflector.


Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die-Cast Aluminum	Electrostatic Painting	PMMA Lens with Outer PC Reflector	Included	Separated - Outside	15°, 36° & 60°

Photometric:

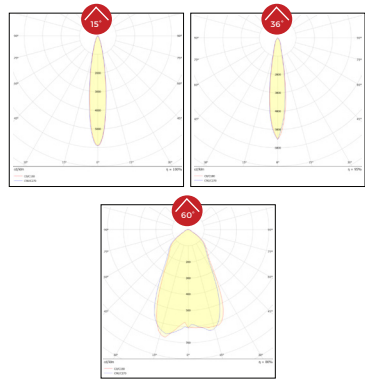

General Dimensions:

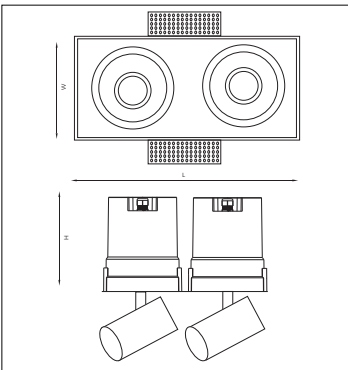

Reflector Finish:



Applications:

