

# RECESSED DOWNLIGHTS

## NEBULA TLR



### Description:

Nebula Pop-out TLR retractable downlights offer exceptional flexibility for residential and retail lighting. They provide precise, focused illumination to highlight interior details. Their retractable structure allows for seamless integration into modern interiors, enabling dynamic lighting adjustments.

### Specifications:

Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)		
								Ø	Cut-out	H
6W	570lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	75	55	86
10W	950lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	95	75	105
14W	1330lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	95	75	105
20W	1900lm	95lm/w	>0.95	≥ 80	2700-5700K	220-240 VAC	50/60 Hz	115	95	127

\*Available in other CCTs on request.


\*Available in CRI 90 on request.

\*Above values are based on SEI calibrated machines testing while using wide beam angles & on the black matt reflector.


### Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die-Cast Aluminum	Electrostatic Painting	PMMA Lens with Outer PC Reflector	Included	Separated - Outside	15°, 36° & 60°

### Photometric:

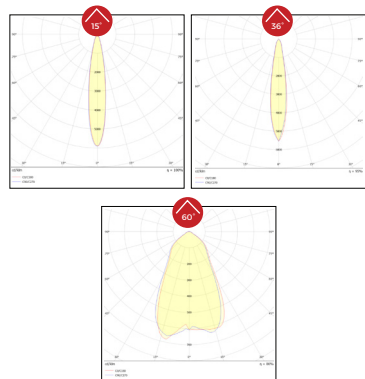

### General Dimensions:



### Reflector Finish:



### Applications:



Category: Indoor      Product Type: Downlight      Mounting Type: Recessed

